



NOVOFLEX PERMANENT SPACER



They are designed to mount discreetly, PCB components in almost any lead pattern and elevation. Available in two basic ID/OD combinations with various spacing heights.



Standard Colour : Natural White

Operating Temperature : -25° C to +85° C

Novoflex Part No.	D I.D.	D1 O.D.	L Length (mm)	Standard Packing
PS5 - 32	3.7	6.4	3.2	100 Nos
PS5 - 48	3.7	6.4	4.8	100 Nos
PS5 - 79	3.7	6.4	7.9	100 Nos
PS5 - 254	3.7	6.4	25.4	100 Nos
PS12 - 32	4.3	6.4	3.2	100 Nos
PS12 - 64	4.3	6.4	6.4	100 Nos
PS12 - 95	4.3	6.4	9.5	100 Nos

Material: High impact Polystyrene. All dimensions in mm.

NOVOFLEX ROUND NYLON SPACERS

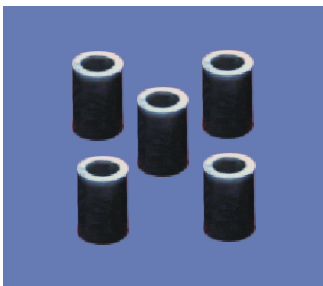

Round nylon spacers are available with OD 6.4 mm to use with M-3 and M-4 screw. They provide high dielectric strength and are resistant to most chemicals.



Standard Colour : Black.

Material : Polyamide.

Operating Temperature : -25° C to +85° C

Novoflex Part No.	Dimensions			Standard Packing
	ID (mm)	OD (mm)	Height (mm)	
EXIM 50	5.3	10.0	5.0	100 Nos.
EXIM 75	5.3	10.0	7.5	100 Nos.

NOVOFLEX LED SPACER

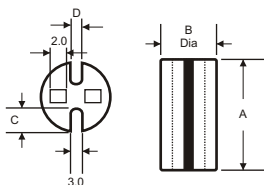

They are designed to provide space between LED and the surface of board minimizing shifting and height variations. They prevent bending and tilting of LED during handling and assembly, ensuring uniformity and production ease. They are installed easily and quickly by hand.


Standard Colour : Black, Natural White colour available against special bulk order.

Operating Temperature : -25° C to +85° C

Novoflex Part No.	A (mm)	B (mm)	C (mm)	D (mm)	Standard Packing
LEDS 2 - 70	7.0	4.7	1.5	2.5	100 Nos

Material: Polyamide.

NOVOFLEX PUSH FIT SNAPPER CLIP

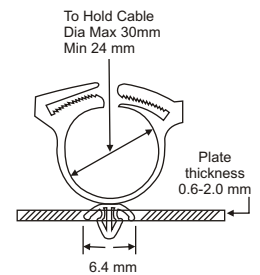

A one piece non-conductive, fool proof holding device for fixing of Can Type Aluminum electrolytic capacitor which can be fitted easily and quickly. Application- just position it on the Capacitor and press the jaws together. For maximum tightness a plier can be used to give that firmness and vibration resistance. The capacitor Holder can be released and reused again and again.



Standard Colour : Natural White.

Operating Temperature : -25° C to +85° C.

Novoflex Part No.	To Hold Cable Dia		Panel Hole Dia	Plate thickness	Standard Packing
	Max.	Min.			
PSC 30	30 mm	24 mm	6.4 mm	0.6-2.0 mm	100 Nos.

Material: Polyamide.

NOVOFLEX EHT WIRE CLAMP FOR Tv MONITORS

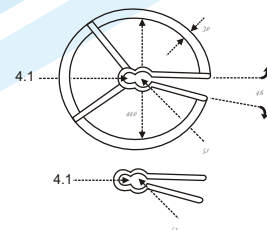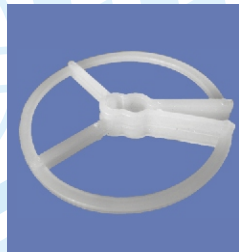

It is designed to protect EHT wires from heat in TVs and Monitors. Its keeps high voltage wires away from other components. Its flexible leg design eases wire insertion and inner leg surrounding wire allows for a positive fit.


Standard Colour : Ultra violet resistant Black / Natural White.

Operating Temperature : -25° C to +85° C.

Novoflex Part No.	Standard Packing
EHTC -1	100 Nos.

Material: Polyamide.

NOVOFLEX EDGE SADDLES

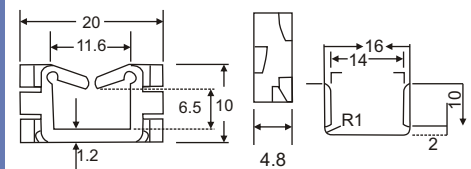

Fits 'U' shaped part of Panel. Protects wires from sharp and / or Panel Edges. Suitable for Panel thickness 1.2 to 1.6 mm.

Standard Colour : Natural White.

Material : Polyamide.

Operating Temperature : -25° C to + 85° C.

Novoflex Part No.	Panel Thickness	Standard Packing
EDS 12	1.2 - 1.6	100 Nos

Material: Polyamide.