


## Double Locking Style PCB Supports

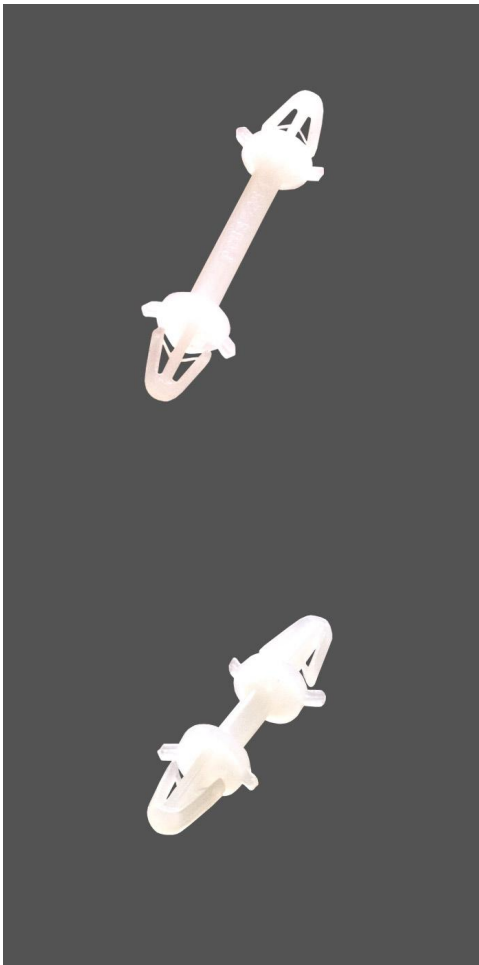

**Novoflex Double Locking Style PCB Supports** are non-conductive and are designed for securing and providing the needed space between PCB and chassis or PCB and PCB. These have a plug-in-fastening method for lower assembly costs and allow wide access for maintenance or equipment modifications. These Supports are mounted easily just by snapping into the board. They are available in 7 standard heights from 4.8 mm to 25.4 mm, board to board. These are designed to fit in 4 mm diameter hole in 1.6 mm thick PCB.

**Material:** Nylon 6 (Polyamide). Resistant to Fungus, Corrosion, and most mild acids.

**Tolerance:**  $\pm 0.50\text{mm}$ .

**Flammability Rating:** UL94 V-2

**Standard Colour:** Natural White.


**Continuous Operating Temperature:**  $-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

**Storage Conditions:** To be stored in a cool, dark, dry place away from sunlight in a sealed condition.


**Example Applications:** Automobiles, Railways, Aviation, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Electric Metering, Electronics, Control Panels, New Project Installations and many more.



TOP VIEW



FRONT VIEW



SIDE VIEW



ISOMETRIC VIEW

**NOVOFLEX - Double Locking Style PCB Supports**

Novoflex Part No.	Spacing Height (A) - mm	Lock Hole Dia - mm	Panel Thickness - mm	Standard Packing (Nos.)
PCBS 48	4.8	4	1.6	100
PCBS 64	6.4	4	1.6	100
PCBS 95	9.5	4	1.6	100
PCBS 115	11.5	4	1.6	100
PCBS 127	12.7	4	1.6	100
PCBS 159	15.9	4	1.6	100
PCBS 254	25.4	4	1.6	100

