

Fiber Drum Seal



Novoflex Fiber Drum Seal is a tamper evident seal, designed to seal the clamping band on fiber drums. Once inserted, it is impossible to release and reinsert. Another security seal can be applied to the hole given near the bottom for extra security. Application is very simple, all you have to do is push it through the clamping band on the fiber drum with your thumb. No tools are required. These seals can be customised with your Company's Name/ Logo, or serialised number printing.

Material: Nylon 6(Polyamide). Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: UL94 V-2


Standard Colour: White, Red, Yellow & Green.

Continuous Operating Temperature: -25° C to +85° C.

Tensile Strength: High Tensile strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Pharmaceutical & Drugs, Chemicals & Dyes, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Electric Metering, Electronics, Control Panels, New Project Installations and many more.

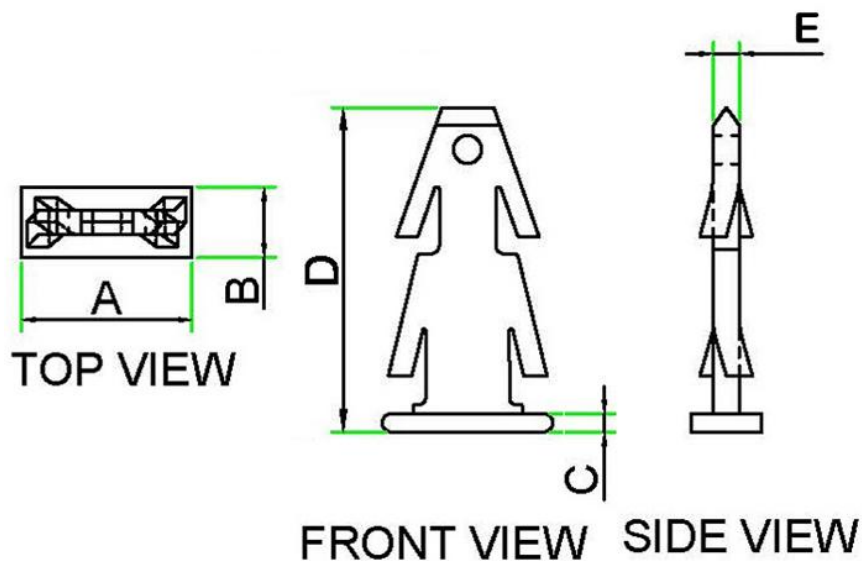

NOVOFLEX - Kwik Lok Security Seals

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Total Height (D) - mm	Thickness (E) - mm	Standard Packing Nos.
FDS 1	18.8	7.8	2	35.8	2.9	100

