

Locking Circuit Board Support



Novoflex Locking Circuit Board Support can just be snapped in by hand for mounting. It has a rigid and permanent grip. No tool is required for installation.

Material: Nylon 6 (Polyamide). Resistant to Fungus, Corrosion, and most mild acids.


Flammability Rating: UL94 V-2

Standard Colour: Natural White.


Continuous Operating Temperature: -25° C to +85° C.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Power Plants, Telecom, Consumer Durables, Retail Stores, Electric Metering, Electronics, Control Panels, New Project Installations and many more.




TOP VIEW

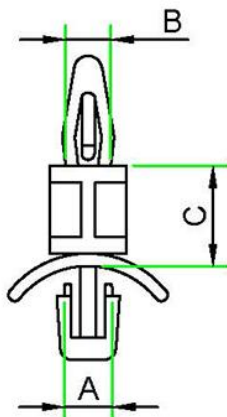

FRONT VIEW



SIDE VIEW

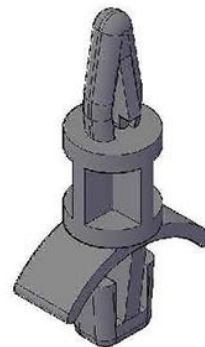

ISOMETRIC VIEW

NOVOFLEX - Locking Circuit Board Support

Novoflex Part No.	Push Hole Dia (A) - mm	Push Hole Dia (B) - mm	Spacing Height (C) - mm	Standard Packing (Nos.)
LCBS 95	4.2	4	9.2	100

