


Permanent Spacers

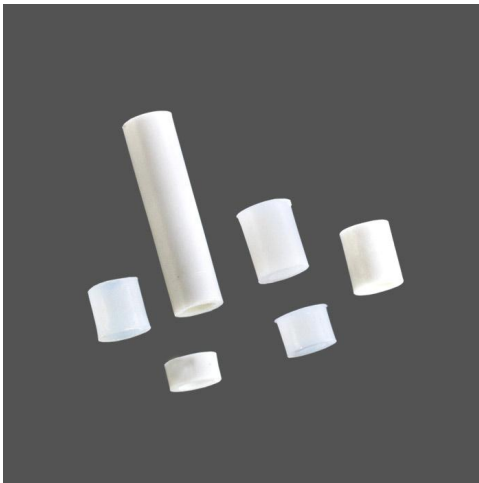

Novoflex Permanent Spacers are designed to mount discreetly, PCB components in almost any lead pattern and elevation. It is available in two basic ID/OD combinations with various spacing heights.

Material: **High impact Polystyrene.** Resistant to Fungus, Corrosion, and most mild acids.



Flammability Rating: **UL94 V-2**

Standard Colour: Natural White.

Operating Temperature: -25° C to +85° C

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Electric Metering, Electronics, Control Panels and many more.



ISOMETRIC VIEW

NOVOFLEX - Permanent Spacers

Novoflex Part No.	Length (A)- mm	Out Side Dia (B)- mm	Inside Dia (C)- mm	Standard Packing (Nos)
PS 5 - 32	3.2	6.4	3.7	100
PS 5 - 48	4.8	6.4	3.7	100
PS 5 - 79	7.9	6.4	3.7	100
PS 5 - 254	25.4	6.4	3.7	100
PS 12 - 32	3.2	6.4	4.3	100
PS 12 - 64	6.4	6.4	4.3	100
PS 12 - 95	9.5	6.4	4.3	100

