

Round Nylon Spacers



Novoflex Round Nylon Spacers are available with OD 6.4 mm to use with M-3 and M-4 screw. They provide high dielectric strength and are resistant to most chemicals.

Material: Polyamide. Resistant to Fungus, Corrosion, and most mild acids.


Flammability Rating: UL94 V-2

Standard Colour: Black.

Operating Temperature: -25° C to +85° C

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Power Plants, Telecom, Consumer Durables, Retail Stores, Electric Metering, Electronics, Control Panels and many more.

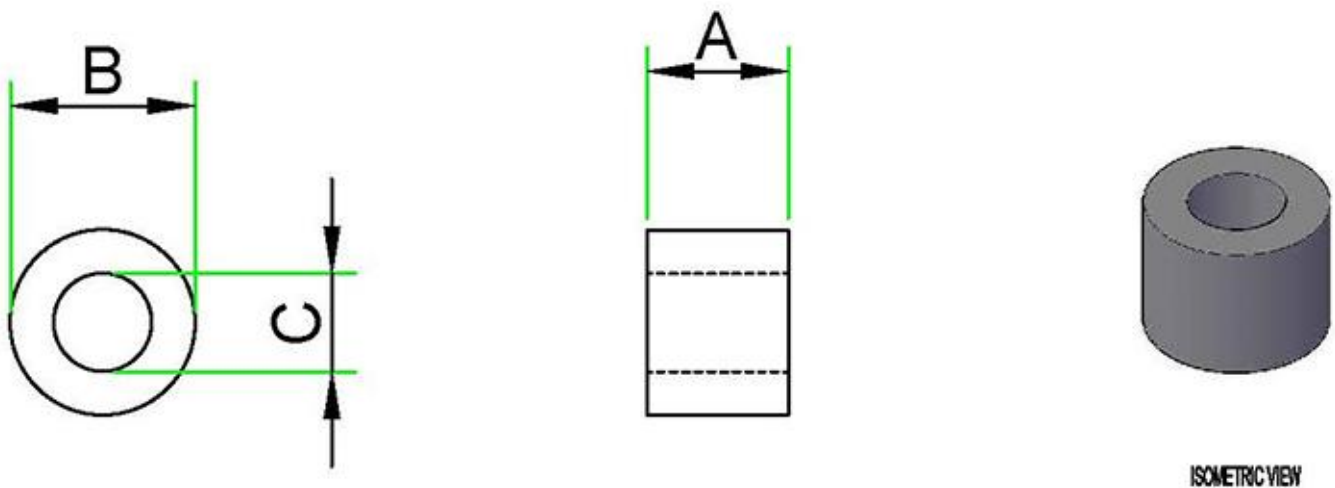

NOVOFLEX - Self Retaining Spacer

Novoflex Part No.	Length (A) - mm	OutSide Dia (B) - mm	Inside Dia (C) - mm	Standard Packing (Nos.)
EXIM 50	5.1	9.8	5.2	100
EXIM 75	7.5	9.8	5.2	100

