

Self Retaining Spacer



Novoflex Self Retaining Spacer is designed to insulate the head of the screw from the PCB while providing desired spacing between PCB and chassis. The PCB mount head snaps in to maintain spacing even when the screw is removed.

Material: **Nylon 6 (Polyamide)**. Resistant to Fungus, Corrosion, and most mild acids.



Flammability Rating: **UL94 V-2**

Standard Colour: Natural White.


Operating Temperature: -25° C to +85° C

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.


Example Applications: Automobiles, Railways, Aviation, Power Plants, Telecom, Consumer Durables, Retail Stores, Electric Metering, Electronics, Control Panels, New Project Installations and many more.

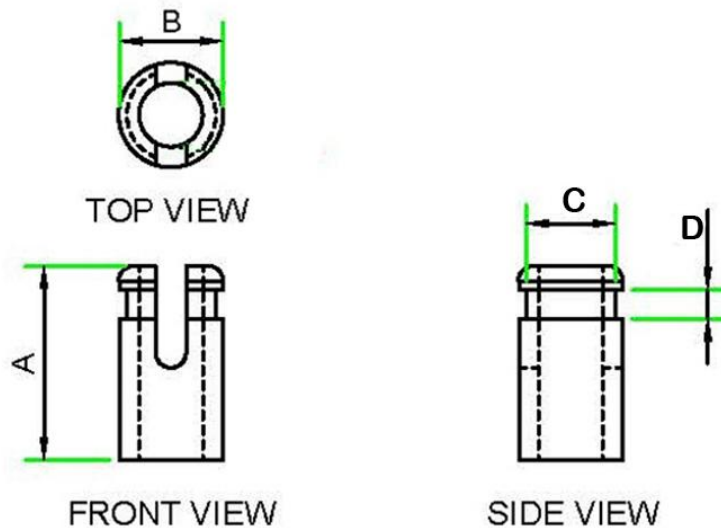

TOP VIEW



FRONT VIEW



SIDE VIEW

NOVOFLEX - Self Retaining Spacer

Novoflex Part No.	Length (A) - mm	OutSide Dia (B) - mm	Push Hole Dia (C) - mm	Chassis Thickness (D)- mm	Standard Packing Nos.
SRS 8 95	13	7	6	1.5	100
SRS 12 191	22.7	7	6	1.5	100

