


## Acid & Chemical Resistant Cable Tie

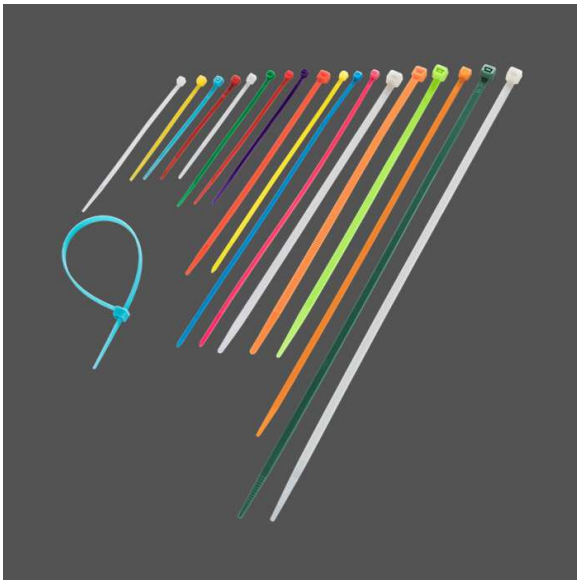

Novoflex Acid & Chemical Resistant Cable Tie are high performance ties with superior tensile strength. Our cable ties offer a superior construction that is lightweight yet offers unmatched durability throughout the life of the product. They can be used manually or in conjunction with our tensioning tools.

Novoflex Acid & Chemical Resistant Cable Tie Non Returnable Cable Ties are designed to withstand harsh chemical environments and are ideal for use in the chemical processing industry and in facilities where equipment is required to be cleaned with harsh chemicals regularly. These cable ties are highly resistant to most chemicals and acids and are recommended for applications in chemical plants.

We recommend the usage of tensioning tools to achieve optimum tightening and a neat finish to your installations.

**Material:** Polypropylene, Resistant to Fungus, Corrosion, and most mild acids.

**Flammability Rating:** UL94 HB

**Standard Colour:** Natural White. Other colours available Orange (O), Red (R), Yellow (Y), Green (G), Sky Blue (SBL), Indigo (I), and Violet (V) subject to a Minimum Order Quantity (MOQ).

**Operating Temperature:** -20° C to +100° C.


**Resistance:** Highly Resistant to most Salt, Alcohol, Bases, Inorganic Acids, Gas, Oil, Lubricants, and Chlorinated Hydrocarbons.

**Buoyant:** Floats to the surface of most liquids making them easily detectable.

**Tensile Strength:** High Tensile Strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

**Storage Conditions:** To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

**Example Applications:** Aviation, Couriers & Logistics, Pharmaceutical & Drugs, Chemicals & Dyes, Consumer Durables, Retail Stores, Computers & Networking, Electronics, Control Panels, New Project Installations, Domestic Use and many more.

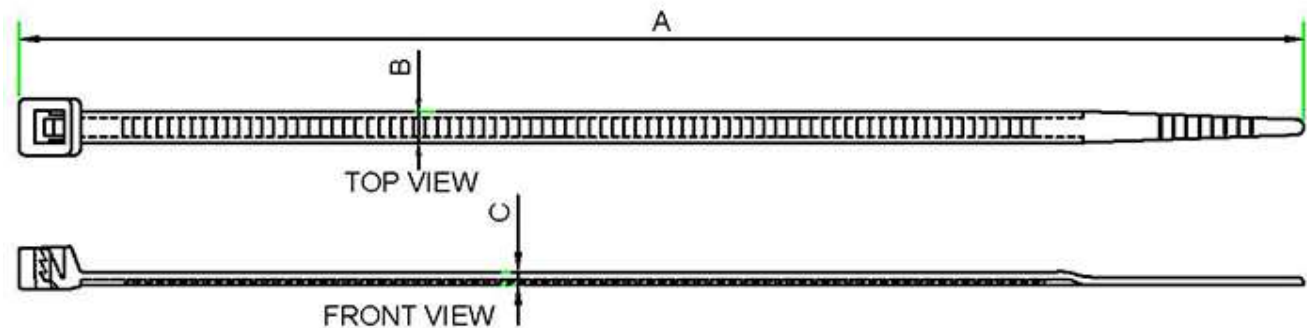

**NOVOFLEX - Acid & Chemical Resistant Cable Tie**

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Min Loop Tensile Strength (kg)	Max Bundle Dia - mm	Standard Packing (Nos)
UAR 10025	100	2.5	1	6	24	1000
UAR 15036	150	3.6	1.2	10	36	1000
UAR 20036	200	3.6	1.1	10	54	100
UAR 20047	200	4.7	1.3	18	50	100
UAR 30047	300	4.7	1.3	18	82	100
UAR 30076	300	7.6	1.6	44	76	100