


Cab Lok Non Returnable Cable Ties

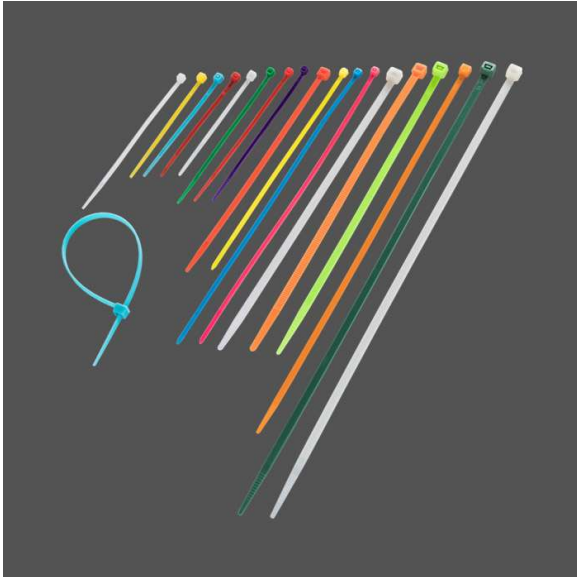

Novoflex Cab Lok Non-Returnable Cable Ties are high performance ties with superior tensile strength. They are manufactured from the toughest of materials, 100% pure and virgin Nylon 6.6 thus imparting a 50% greater tensile strength (measured at DAM values) than the industry standard. Our cable ties offer a superior construction that is lightweight yet offers unmatched durability throughout the life of the product. They can be used manually or in conjunction with our tensioning tools.

We recommend the usage of tensioning tools to achieve optimum tightening and a neat finish to your installations.

Material: UL Listed Nylon 6.6. Resistant to Fungus, Corrosion, and most mild acids. Can also be manufactured in HSB, HTR, FR materials or customer specific colours specific to MOQ.

Flammability Rating: UL94 V2.

Standard Colour: Natural White & UV Resistant Black (B). Other colours available Orange (O), Red (R), Yellow (Y), Green (G), Sky Blue (SBL), Dark Blue (DBL) subject to a Minimum Order Quantity (MOQ).

Continuous Operating Temperature: -25° C to +85° C.


Intermittent Operating Temperature: -25° C to +105° C (up to 500 hours).

Halogen Free: Yes.

Tensile Strength: High Tensile Strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Pharmaceutical & Drugs, Chemicals & Dyes, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Food Processing, Electric Metering, Electronics, Control Panels, New Project Installations, Domestic Use and many more.

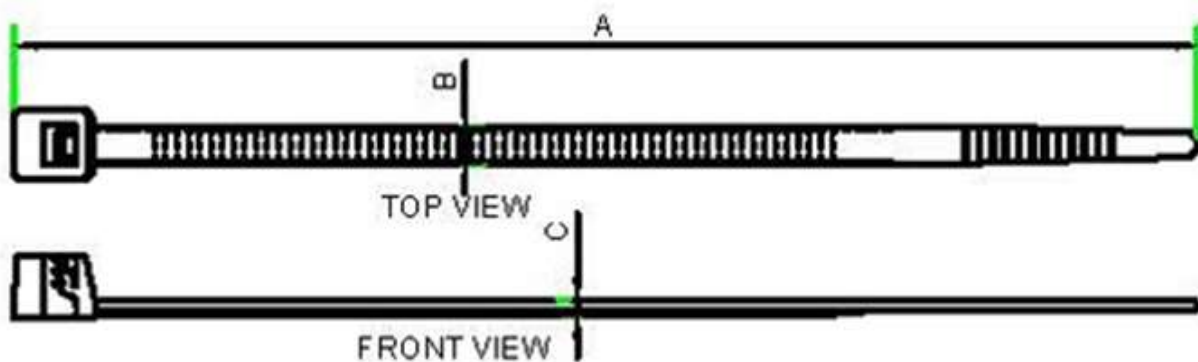

NOVOFLEX - Cab Lok Non Returnable Cable Ties

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Min Loop Tensile Strength (kg)	Max Bundle Dia - mm	Standard Packing (Nos)
CPS 100 ES	100	2.5	1.1	8	24	1000
CPSS 150 ES	150	2.5	1.1	8	40	1000
CPSS 200 ES	200	2.5	1.2	8	55	1000
CPS 30150 ES	150	3	1.1	12	38	1000
CPS 150 ES	150	3.6	1.2	14	36	1000
CPS 30200 ES	200	3	1.1	12	54	100
CPS 200 ES	200	3.6	1.2	14	54	100
CPS 250 ES	250	3.6	1.2	14	70	100
CPSS 300 ES	300	3.6	1.2	14	86	100
CP 200 ES	200	4.7	1.2	22	50	100
CP 250 ES	250	4.7	1.3	22	64	100
CPS 300 ES	300	4.7	1.3	22	82	100
CPS 368 ES	368	4.7	1.3	22	103	100
CPS 450 ES	450	4.8	1.4	22	130	100
CPS 550 ES	550	4.6	1.3	22	162	100
CP 150 HD	150	7.6	1.5	55	32	100
CP 200 HD	200	7.6	1.5	55	49	100
CP 250 HD	250	7.6	1.5	55	65	100



CP 300 ES	300	7.6	1.6	55	76	100
CP 380 ES	380	7.6	1.5	55	108	100
CP 450 ES	450	7.5	1.6	55	125	100
CP 550 ES	550	9	1.8	80	156	100
CP 610 ES	610	9	1.8	80	170	100
CP 750 ES	750	9	1.8	80	219	100
CP 920 ES	920	9	1.8	80	275	100
CP 650 EHD	650	12.2	2	90	185	100

