

Double Head Cable Tie



Novoflex Double Head Cable Ties are designed with two heads which create an inside as well as outside serrated loop. They are primarily used for routing of two different diameter cable bundles which need to run parallel to each other and yet stay separated from each other. The Double Head Cable Ties allow you to accomplish both tasks with only one cable tie. It is an excellent method of securing a harness and fixing it to another harness, panel or any other mounting object.

Material: **UL Listed Nylon 6.6.** Resistant to Fungus, Corrosion, and most mild acids. Can also be manufactured in HSB, HTR, FR materials or customer-specific colours specific to MOQ.

Flammability Rating: **UL94 V2.**

Standard Colour: **UV Resistant Black (B).**


Operating Temperature: **-25° C to +85° C**

Halogen Free: **Yes.**

Tensile Strength: **High Tensile Strength** provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Wiring Harness, Automotive, 2 Wheelers, Trucking and Heavy Equipment manufacturing industries.

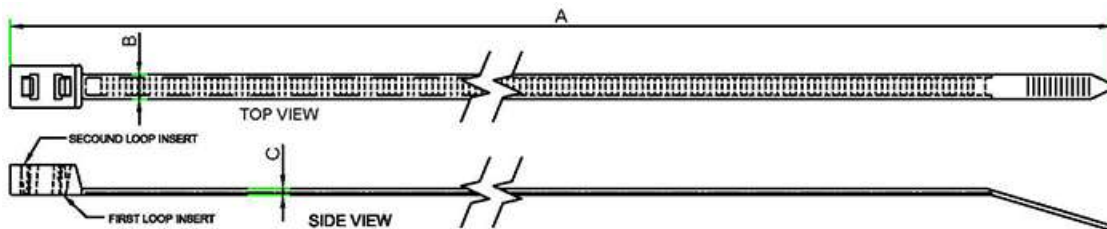

NOVOFLEX - Double Head Cable Tie

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Max Bundle Dia - mm	Min Loop Tensile Strength (kg)	Max. Cable Bundle Dia (per Loop)	Min. Tensile Strength (Loop 2) kgf	Standard Packing (Nos)
CP 400 DH	400	4.7	1.3	101	20	51	18	100
CP 200 DH	200	4.7	1.3	50	20	25	18	100