

Metric Thread Hexagonal Nylon Cable Glands



Novoflex Metric Thread Hexagonal Nylon Cable Glands unique design out-dates and out-performs the traditional Brass Cable Glands used as general purpose glands for plastic or rubber insulated, un-armoured, and plastic or rubber over sheathed cables. These glands are manufactured from a high grade engineering thermoplastic, an inherently strong compound that is self extinguishing and corrosion resistant. These Glands absorb variations and shocks better than the traditional brass cable glands. It is available to suit cable diameter 6 mm to 27 mm in Metric Thread.

- Volume resistivity 1.5 x 10¹² ohm-cm
- Tensile Strength 595 kg/cm²
- Corrosion resistant
- Self Extinguishing
- Self Lubricating

Material: Nylon 6 Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: UL94 V-2 Resistant to Fungus, Corrosion, and most mild acids.

Standard Colour: UV Resistant Black.

Operating Temperature: -25° C to +85° C


Volume Resistivity: 1.5 x 10¹² ohm-cm

Halogen Free: Yes

Tensile Strength: High Tensile Strength provides a secure grip on the cables and prevents damage from external forces.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Ship Building, Power Plants, Telecom, Consumer Durables, Computers and Networking, Electric Metering, Electronics, Control Panels, Connector Boxes, Junction Boxes, Battery Packs.

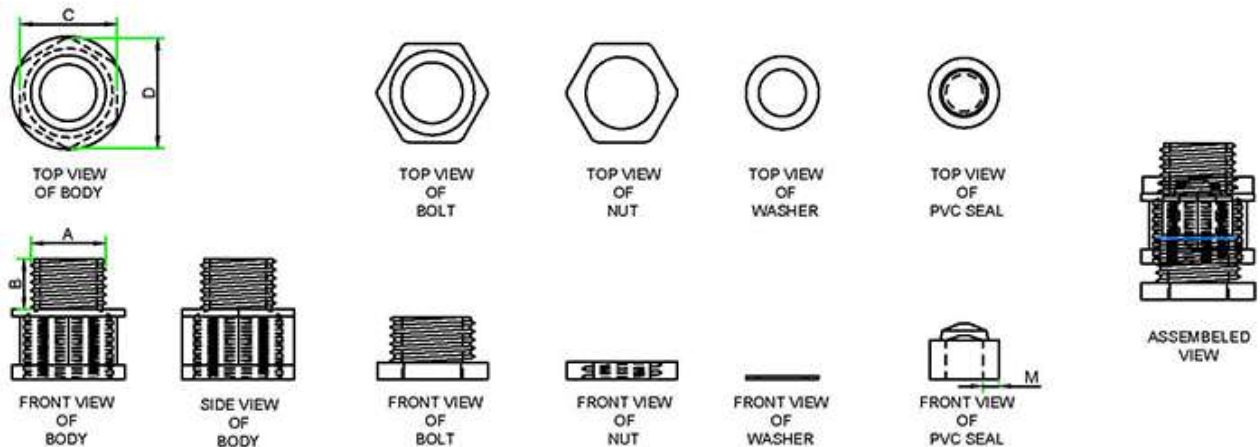

NOVOFLEX - Metric Thread Hexagonal Nylon Cable Glands

Novoflex Part No.	Entry Thread Dia (A) - mm	Thread Length (B) - mm	Across Flats (C) - mm	Across Corner (D) - mm	Cable Sealing Range Min. - mm	Cable Sealing Range Max. - mm	Standard Packing (Nos.)
NG 16 MS	16	10	20	22	6	8	100
NG 16 M	16	10	20	22	8	12	100
NG 20 MS	20	10	26	29	8	12	100
NG 20 M	20	10	26	29	10	16	100
NG 25 M	25	10	30	33	14	21	100
NG 32 M	32	10	41	46	19	27	100

