

## MG Metric Thread Cable Gland

Novoflex **MG Metric Thread Cable Gland** are used to protect cables from breakage/ right angle bending. Generally used on cable and wires attached to moving machinery parts and entry points of enclosures, cable glands provide fool proof protection. The gripping teeth at the head of the cable gland provide a firm hold on the cables relieving them of strains and stresses, while the seals below prevent damage and cut to the wires. Coupled with an additional washer, the cable glands can provide **IP68** rated protection thus ensuring the longevity of the machinery.



Some salient features and technical data:

- Water and dust proof (IP 68 Rated)
- Quick and easy assembly
- High Strain Relief for cables
- Wide Clamping Range
- Suitable for unarmoured, plastic insulated cables
- Deflection temperature under load at 66 psi 151° C
- Automatic Centering & Fixing
- Vibration Proof
- Suitable for Indoor and Outdoor use
- Non-Magnetic, non-conductive
- Compact Streamline Construction
- Volume resistivity 1.5 x 10<sup>12</sup> ohm-cm
- Tensile Strength 595 kg/cm<sup>2</sup>
- Corrosion resistant
- Self Extinguishing
- Self Lubricating



**Material:** **Nylon 6** Resistant to Fungus, Corrosion, and most mild acids.

**Flammability Rating:** **UL94 V-2** Resistant to Fungus, Corrosion, and most mild acids.

**Standard Colour:** UV Resistant Black and Ivory Gray.


**Operating Temperature:** -25° C to +85° C

**Halogen Free:** Yes

**Tensile Strength:** **High Tensile Strength** provides a secure grip on the cables and prevents damage from external forces.

**Storage Conditions:** To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

**Example Applications:** Automobiles, Railways, Aviation, Ship Building, Power Plants, Telecom, Consumer Durables, Computers and Networking, Electric Metering, Electronics, Control Panels, Connector Boxes, Junction Boxes, Battery Packs.

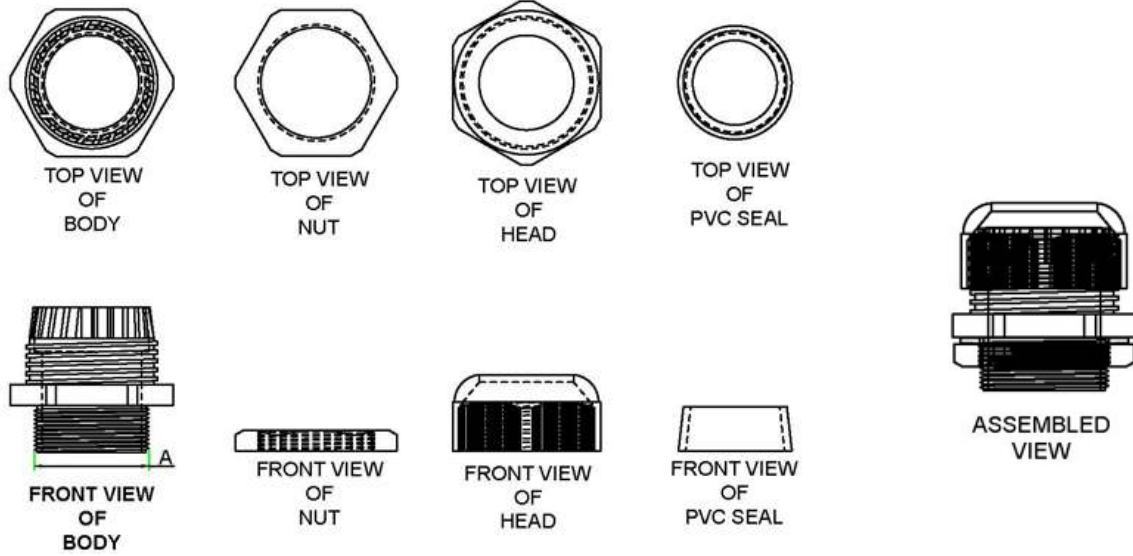

### NOVOFLEX - MG Metric Thread Cable Gland

Novoflex Part No.	Entry Thread Metric	Mounting Hole (A) - mm	Cable Sealing Range Min. - mm	Cable Sealing Range Max. - mm	Standard Packing (Nos.)
MG 12	M12 X 1.25	11.7	4	6.5	100
MG 16	M16 X 1.5	15.7	6	8.5	100
MG 20	M20 X 1.5	20	8.5	12	100
MG 22	M22 X 1.5	21.8	10	15.5	100
MG 25	M25 X 1.5	25	11	17	100
MG 32	M32 X 1.5	31.5	16	20	100
MG 40	M40 X 1.5	40	25	31	100