

## Mounting Buttons



Novoflex Mounting Buttons are designed to hold securely two or more panels with the advantage and ease of application by thumb pressure. It is resistant to corrosion or attack by most chemicals and is used in many industries for plugging holes in single panels, fixing identification plates, securing access panels, trim panels and for fastening insulation materials.

**Material:** Nylon 6 (Polyamide)


**Flammability Rating:** UL94 V-2, Resistant to Fungus, Corrosion, and most mild acids.

**Standard Colour :** Natural White and Black

**Operating Temperature :** -25° C to +85° C

**Storage Conditions :** To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

**Example Applications :** Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Pharmaceutical & Drugs, Chemicals & Dyes, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Food Processing, Electric Metering, Electronics, Control Panels, New Project Installations, Domestic Use and many more.

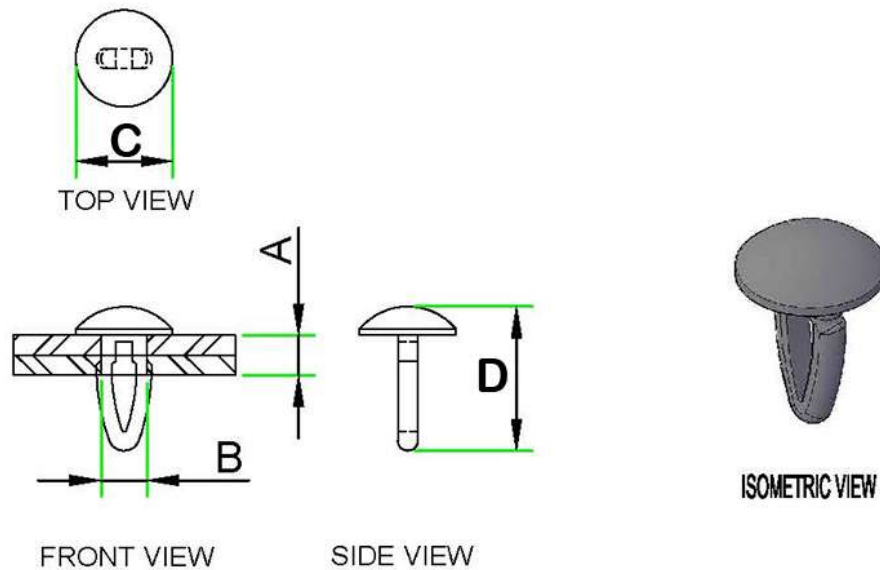

### NOVOFLEX - Mounting Buttons

Novoflex Part No.	Material Thickness (A) - mm	Push Hole Dia (B) - mm	Head Dia (C) - mm	Length (D) - mm	Standard Packing (Nos.)
MB 01	2.5 - 3.5	4	7.7	11.5	1000