

Polyester Coated Stainless Steel Cable Ties



Novoflex Polyester Coated Stainless Steel Ball-lock Cable Ties provide greater safety than other stainless steel cable ties by featuring a low-smoke, halogen-free polyester coating, which releases fewer toxins if burned. Additional safety features include rolled edges on the strap, which eliminates the risk of damage to cables and injury to installers. The polyester coating also provides the cable ties with additional protection against weather, chemical, UV radiation, corrosion, impact, abrasion and cracking. Polyester Coated Stainless Steel Ball-Lock Cable Ties are also resistant to extreme temperatures and are anti-magnetic. The ties follow a positive ball locking technology which is a secure locking system and prevents release of the lock. They are best suited for long term applications and extreme condition applications.

Material: Stainless Steel Type SS316 with Polyester coating.

Max Degree of Hardness: (VPN) 190.


Continuous Operating Temperature: -50° C to +150° C.

Tensile Strength: **High Tensile Strength** provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

High Customisation: The cable ties are available in a variety of lengths and can be customised as per your requirements.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Ideal for demanding applications of offshore drilling rigs, Petroleum refineries, Shipyards and Chemical Processing Plants.

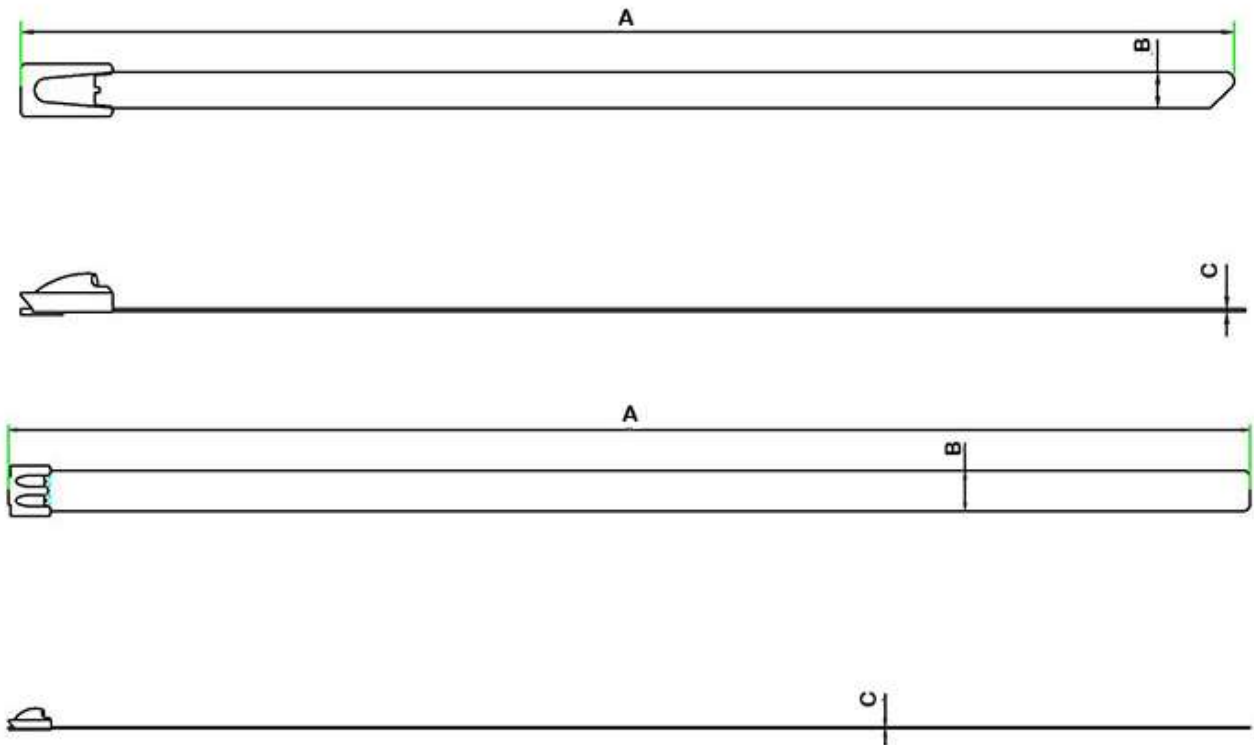

NOVOFLEX - Polyester Coated Stainless Steel Cable Ties						
Novoflex Part No.	Length A (mm)	Width B (mm)	Thickness C (mm)	Max Dia (mm)	Tensile Strength (Kg)	Standard Packing (Nos.)
SS-46-100 C	100	4.6	0.38	26	55	100
SS-46-150 C	150	4.6	0.38	35	55	100
SS-46-200 C	200	4.6	0.38	51	55	100
SS-46-250 C	250	4.6	0.38	62	55	100
SS-46-300 C	300	4.6	0.38	75	55	100
SS-46-360 C	360	4.6	0.38	90	55	100
SS-46-450 C	450	4.6	0.38	112	55	100
SS-46-520 C	520	4.6	0.38	130	55	100
SS-79-100 C	100	7.9	0.38	26	105	100
SS-79-150 C	150	7.9	0.38	35	105	100
SS-79-200 C	200	7.9	0.38	51	105	100
SS-79-250 C	250	7.9	0.38	62	105	100
SS-79-300 C	300	7.9	0.38	75	105	100
SS-79-360 C	360	7.9	0.38	90	105	100
SS-79-450 C	450	7.9	0.38	112	105	100
SS-79-520 C	520	7.9	0.38	130	105	100
SS-79-680 C	680	7.9	0.38	170	105	100
SS-120-360 C	360	12	0.38	90	210	100
SS-120-520 C	520	12	0.38	130	210	100
SS-120-680 C	680	12	0.38	170	210	100
SS-120-840 C	840	12	0.38	210	210	100

