

Snap Rivet



Novoflex Snap Rivet is a two piece all plastic blind rivet that securely joins two or more materials of varying thickness. It is suitable for fastening most materials including metal, wood, hardboard, rubber, glass and specialty plastic. It provides positive locking and is vibration resistant.

Material : Nylon 6 (Polyamide)

Flammability Rating: UL94 V-2, Resistant to Fungus, Corrosion and most mild acids.


Standard Colour : Black

Operating Temperature : -25° C to +85° C

Storage Conditions : To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications : Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Pharmaceutical & Drugs, Chemicals & Dyes, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Food Processing, Electric Metering, Electronics, Control Panels, New Project Installations, Domestic Use and many more.

Snap Rivet Application:

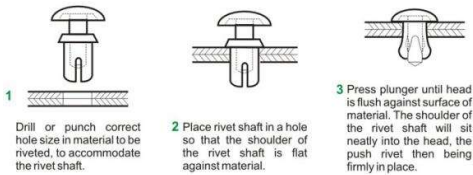


1

Drill or punch correct hole size in material to be riveted, to accommodate the rivet shaft.

2 Place rivet shaft in a hole so that the shoulder of the rivet shaft is flat against material.

3 Press plunger until head is flush against surface of material. The shoulder of the rivet shaft will sit neatly into the head, the push rivet then being firmly in place.

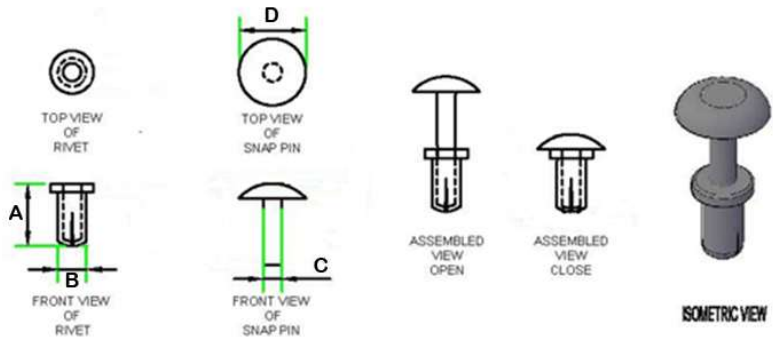

NOVOFLEX - Snap Rivet

Novoflex Part No.	Rivet length (A) - mm	Hole Dia (B) - mm	Snap Pin Width (C) - mm	Snap Pin Head Dia (D) - mm	Plate Thickness- mm	Standard Packing (Nos.)
SR 355	6.4	3	1.9	6	2.5 - 4.0	500
SR 365	7.7	3	1.9	6	3.5 - 5.0	500
SR 3545	6	3.5	1.9	6.5	3.5 - 5.0	500
SR 3565	8	3.5	2	6.1	3.5 - 5.0	500
SR 4040	5	4	2.4	8	1.5 - 2.5	500
SR 4080	9	4	2.5	8	3.5 - 5.0	500