


## Spirowrap Harness Band

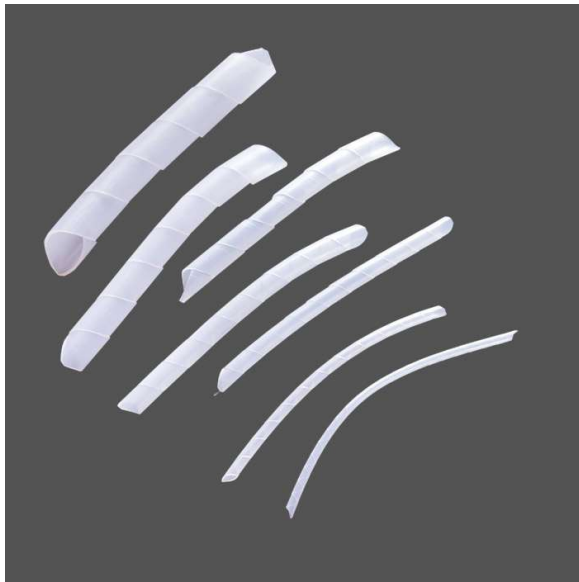

**Novoflex Spirowrap Harness Bands** offer an economical and easy method for protection of wires, cables, wiring harnesses and tubing's from abrasion. They ensure a neat, quick & economical cable bundling while also protecting the system from dust and moisture. The spiral cut design allows cables to be drawn out at fixed intervals as may be required. It is used mainly to create wiring harnesses for electrical, electronic, telecommunication, and automobiles.

**Material: LDPE.** Resistant to Fungus, Corrosion, and most mild acids.

**Flammability Rating: UL94 V2.**


**Standard Colour: Natural White.**

**Operating Temperature: -20° C to +80° C.**

**Halogen Free: Yes.**

**Storage Conditions:** To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

**Example Applications:** Project Installations, Electronics, Control Panels, Automobile, Railways, Aviation and Electrical Industries.

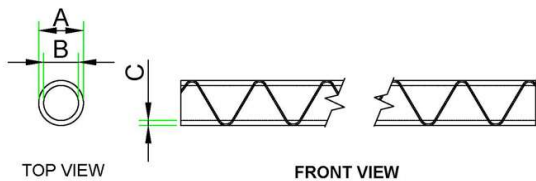

### NOVOFLEX - Spirowrap Harness Band

Novoflex Part No.	Outside Dia A (mm)	Inside Dia B (mm)	Thickness C (mm)	Pitch (mm)	Suggested Bundle Dia Range (mm)	Standard Packing (Mtr.)
SW 3	4	2.6	0.7	4.8	1.6 to 13	50
SW 6	6.3	4.8	0.8	9.5	4.8 to 51	50
SW 9	9.2	7.2	1	11.1	7.9 to 76	25
SW 12	11.2	9.2	1	12.7	9.5 to 101	25
SW 15	15.5	13.1	1.2	16.5	12.7 to 114	25
SW 19	18.8	15.8	1.5	19	5 to 127	25
SW 25	24.2	20.2	2	25.4	20.6 to 178	25