

Cab Lok Fixed Length Cable Tie



Novoflex Cab Lok Fixed Length Cable Ties are designed with a stopper along the length of the body. This restricts the movement of the locking head beyond the stopper to ensure a secure locking beyond the specified bundle diameter. The cable ties are **available in both reusable and non reusable variants**.

This is useful when working with cable bundles that require a specific tolerance of bundling.

Material: UL Listed Nylon 6.6. Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: UL94 V2.

Standard Colour: UV Resistant Black (B).


Operating Temperature: -25° C to +85° C.

Halogen Free: Yes.

Tensile Strength: High Tensile Strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Connector Boxes, Junction Boxes, Wiring Harnesses.

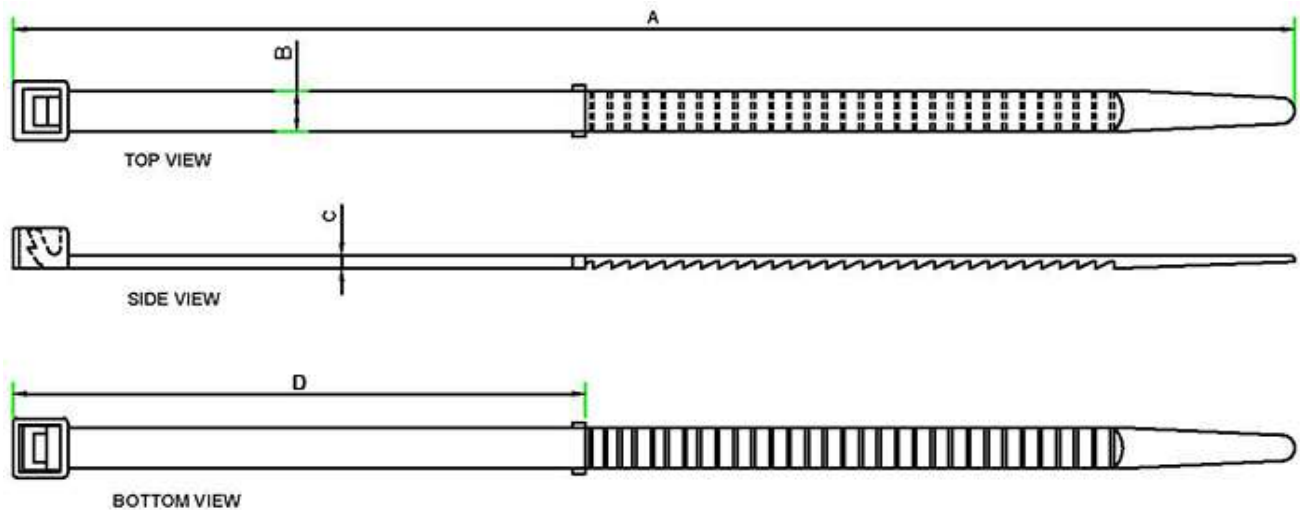

NOVOFLEX - Cab Lok Fixed Length Cable Tie

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Fixed Length (D) - mm	Type	Standard Packing (Nos)
CPRF 150	150	4.6	1.4	80	Reusable	100
CPRF 12030	150	4.6	1.4	120	Reusable	100
CPSF 7080	150	4.7	1.5	70	Non Reusable	100
CPSF 5793	150	4.7	1.5	57	Non Reusable	100

