

Disc Push Mount Cable Ties



Novoflex Disc Push Mount Cable Ties can securely attach cable bunches to a panel or chassis, without the need of any fixing tool. This can be done by simply pushing the head anchor through the chassis/ fixing point and then tying the cable bunches with the tie. The anchor fits securely into the hole of your chassis, providing a solid, rattle-free installation.

When fully inserted, the disc at the bottom of the clip provides additional protection from outer elements such as dust, water, acids, and oils thereby increasing the life of the wiring system exponentially.

Material: UL Listed Nylon 6.6. Resistant to Fungus, Corrosion, and most mild acids. Can also be manufactured in HSB, HTR, FR materials or customer specific colours specific to MOQ.

Flammability Rating: UL94 V2.

Standard Colour: UV Resistant Black (B).


Operating Temperature: -25° C to +85° C.

Halogen Free: Yes.

Tensile Strength: High Tensile Strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Wiring-Harness, Automotive, 2 Wheelers, Trucking and Heavy Equipment manufacturing industries.

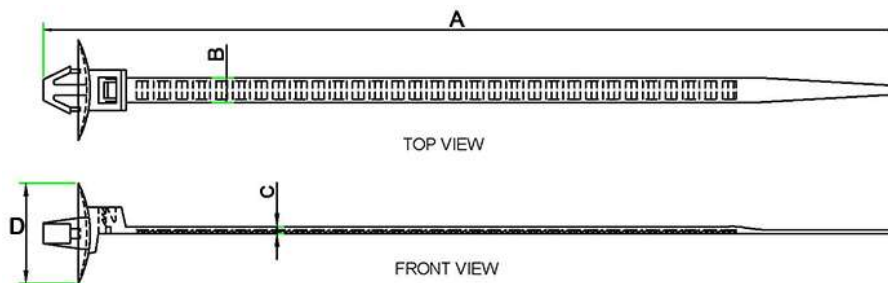

NOVOFLEX - Disc Push Mount Cable Ties

| Novoflex Part No. | Length (A) - mm | Width (B) - mm | Thickness (C) - mm | Disc Dia (D) - mm | Push Hole Dia - mm | Plate Thickness - mm | Max Bundle Dia - mm | Min Loop Tensile Strength (kg) | Standard Packing (Nos) |
|-------------------|-----------------|----------------|--------------------|-------------------|--------------------|----------------------|---------------------|--------------------------------|------------------------|
| DPM 165 | 165 | 4.8 | 1.3 | 19.3 | 6.5 - 7.0 | 1.0 - 1.8 | 36 | 14 | 100 |