


Identification Cable Ties

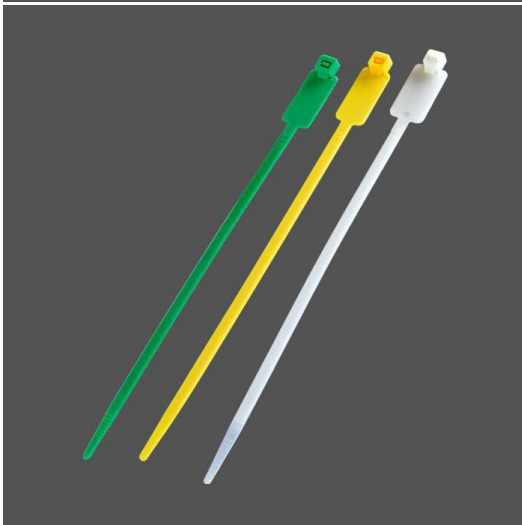

Novoflex Cab-Lok Identification Cable Ties are high performance ties with superior tensile strength. They are manufactured from the toughest of materials, 100% pure and virgin Nylon 6.6 thus imparting a 50% greater tensile strength (measured at DAM values) than the industry standard. Our Cable Ties offer a superior construction that is lightweight yet offers unmatched durability throughout the life of the product. They can be used manually or in conjunction with our tensioning tools.

We recommend the usage of tensioning tools to achieve optimum tightening and a neat finish to your installations.

Novoflex Cab-Lok Identification Ties have been designed with a blank plate area near the head of the cable ties where text and/or numbers can be inscribed with an indelible ink pen. This space is also customisable to include your company logo and/or a 7 digit serial number. These are ideal for tagging of cables or cable bunches during networking or when working with large volumes of bundles of cables.

Material: **UL Listed Nylon 6.6**, Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: **UL94 V-2**.

Standard Colour: Natural White; Other colours available Orange (O), Red (R), Yellow (Y), Green (G), Sky Blue (SBL), Dark Blue (DBL) subject to a Minimum Order Quantity (MOQ).

Continuous Operating Temperature: **-25° C to +85° C**.


Intermittent Operating Temperature: **-25° C to +105° C (up to 500 hours)**.

Halogen Free: **Yes**.

Tensile Strength: **High Tensile Strength** provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Couriers & Logistics, Ship Building, Pharmaceutical & Drugs, Chemicals & Dyes, Power Plants, Telecom, Consumer Durables, Retail Stores, Computers & Networking, Food Processing, Electric Metering, Electronics, Control Panels, New Project Installations, Domestic Use and many more.

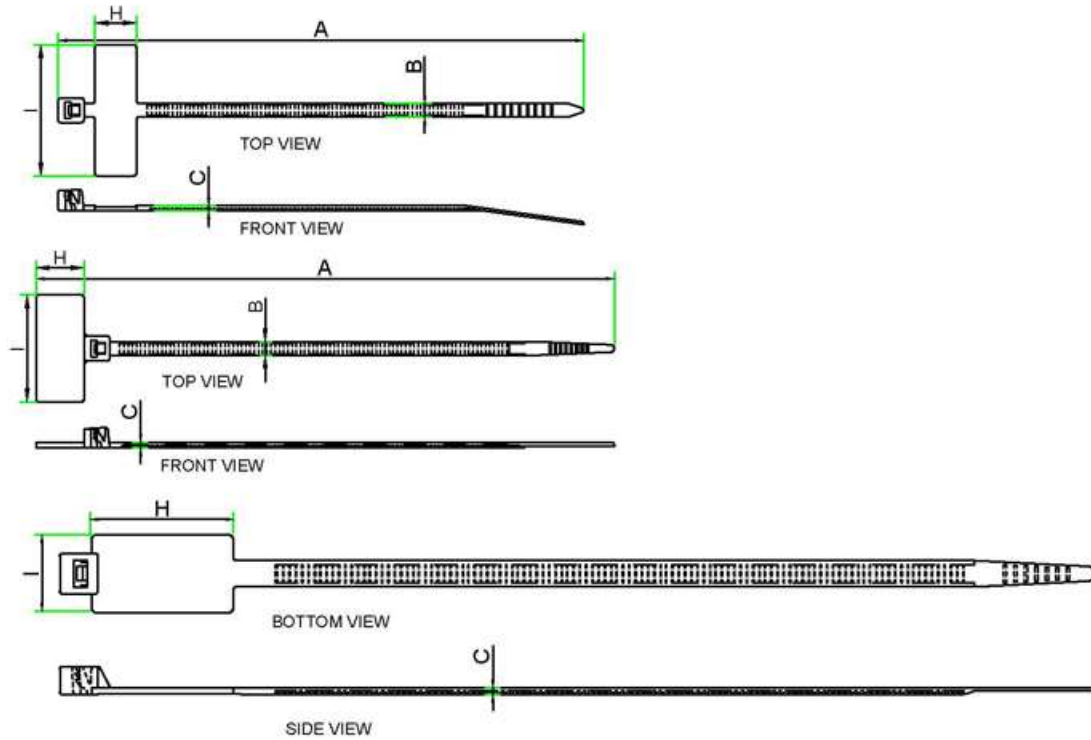

NOVOFLEX - Identification Cable Ties

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Print Area (H X I) - mm	Min Loop Tensile Strength (kg)	Max Bundle Dia - mm	Standard Packing (Nos)
CPI 100	100	2.6	1	8.0 X 25.0	8	19	100
CPI 110	110	2.5	1	9.0 X 20.0	8	23	100
CPI 200	200	5	1.3	27.0 X 15.0	22	50	100