

Kwik Lok Security Seals



Novoflex Kwik Lok Security Seals are tamper evident security seals. It is versatile and cost-effective. No tools are required for application or removal of these seals. The pull-up action ensures quick application and immediate security. It is available blank or sequentially numbered as per requirement.

Material: Manufactured from **UL approved Nylon 6.6 material**. It is also available in PP material. Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: **UL94 V-2**


Standard Colour: Available in different colours.

Continuous Operating Temperature: -25° C to +85° C.

Tensile Strength for Lock: More than 20 kgs.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Truck Sealing, Fiber Drums, Zippered Money Bag, Information Tag, Emergency Doors, Dispenser Tanks, Cash Bag, Fire Extinguishers.

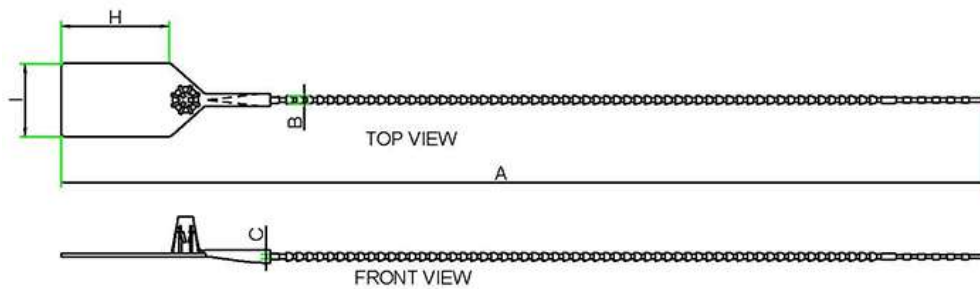

NOVOFLEX - Kwik Lok Security Seals

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Print Area(H X l) - mm	Max Bundle Dia - mm	Standard Packing (Nos.)
KL 26	253	2.3	1.3	18 X 30	74	100

NOVOFLEX - Kwik Lok Security Seals (Polypropylene)

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Print Area(H X l) - mm	Max Bundle Dia - mm	Standard Packing (Nos.)
KL 26 PP	253	2.3	1.3	18 X 30	74	100