

Oval Disc Arrowhead Cable Tie



Novoflex Oval Disc Arrowhead Cable Ties can securely attach cable bunches to a panel or chassis, without the need of any fixing tool. This can be done by simply pushing the arrowhead through the chassis/ fixing point and then tying the cable bunches with the tie. The arrowhead is designed for fitment in oval holes.

When fully inserted, the disc at the bottom of the clip provides additional protection from outer elements such as dust, water, acids, oils thereby increasing the life of the wiring system exponentially.

Material: **UL Listed Nylon 6.6**, Resistant to Fungus, Corrosion, and most mild acids. Can also be manufactured in HSB, HTR, FR materials or customer specific colours specific to MOQ.

Flammability Rating: **UL94 V-2.**

Standard Colour: UV Resistant Black (B).


Operating Temperature: **-25° C to +85° C.**

Halogen Free: **Yes.**

Tensile Strength: **High Tensile Strength** provides a secure locking which will not slip, come off or slacken.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Wiring Harness, Automotive, 2 Wheelers, Trucking, Aviation and Heavy Equipment manufacturing industries and many more.

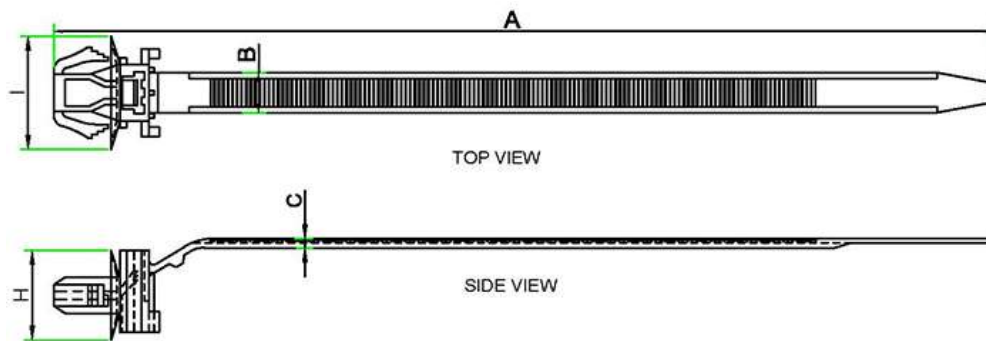

NOVOFLEX - Oval Disc Arrowhead Cable Tie

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Disc Dia (H X I) - mm	Push Mount Hole Dia - mm	Panel Thickness - mm	Max Bundle Dia - mm	Min Loop Tensile Strength (kg)	Standard Packing (Nos)
ODA 166	166	7	1.6	15.7 X 19.9	7.0 X 12	0.5 - 2.0	35	22	100

