

Reusable Push Mount Cable Ties



Novoflex Reusable Push Mount Cable Ties can securely attach cable bunches to a panel or chassis, without the need of any fixing tool. This can be done by simply pushing the head anchor through the chassis/fixing point and then tying the cable bunches with the tie. The anchor fits securely into the hole of your chassis, providing a solid, rattle-free installation.

Novoflex Reusable Push Mount Cable Ties can be opened and used multiple times as per the user requirement. These are particularly beneficial where last minute changes are required/anticipated in the wiring or regular maintenance of wiring bundles are required.

Material: UL Listed Nylon 6.6, Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: UL94 V-2.

Standard Colour: UV Resistant Black (B).


Operating Temperature: -25° C to +85° C.

Halogen Free: Yes.

Tensile Strength: High Tensile Strength provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Wiring-Harness, Automotive, 2 Wheelers, Trucking and Heavy Equipment manufacturing industries.

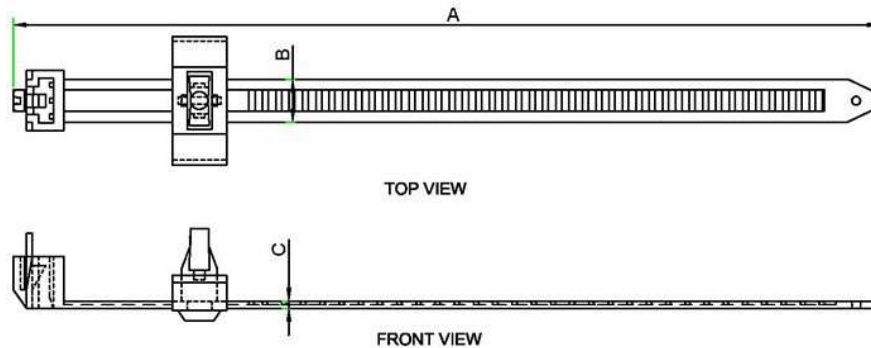

Novoflex Part No.	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Max Bundle Dia - mm	Push Hole Dia - mm	Panel Thickness - mm	Standard Packing (Nos)
CB 160	160	8	1.4	45	6.9 - 7.0	1.0 - 2.5	100