

Flexiguard Closed Grommet Rings



Novoflex Flexiguard Closed Grommet Rings are designed to simply snap into holes and protect wires, cable cords and conduits against damage from sharp edges. These flexible rings, made from special purpose PVC also insulate the holes in sheet metals and offer superior resistance against fluids, mineral oils, aromatic fuels, vegetable oils, etc. The closed grommet rings are designed with a sheath that can be cut as per the required diameter thereby providing a tight glove like fit against the cables.

Material: Special Purpose Soft PVC. Resistant to Fungus, Corrosion, and most mild acids.



Flammability Rating: UL94 V2.

Standard Colour: UV Resistant Black.

Operating Temperature: -20° C to +70° C.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Telecom equipment, Control Panels, Cabinets.

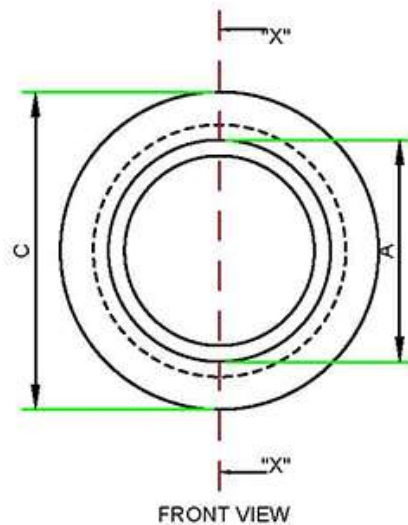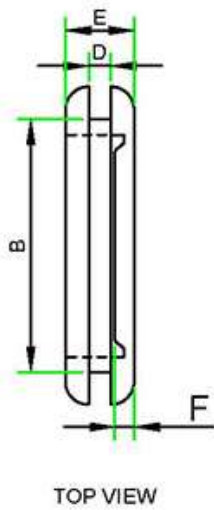

SECTION VIEW OF "X" - "X"



ISOMETRIC VIEW

NOVOFLEX - Flexiguard Open Grommet Rings							
Novoflex Part No.	Cable Dia A (mm)	Panel Hole Dia B (mm)	Grommet Out Side Dia C (mm)	Panel Thickness D (mm)	Thickness E (mm)	Wall Thickness F (mm)	Standard Packing (Nos)
GR 10 C	6	10	13	1.7	5.5	1.3	100
GR 13 C	7.7	13	16	1.5	5.1	1.2	100
GR 16 C	11	15.5	19	1.6	5.8	1.6	100
GR 20 C	16	19.4	25.3	1.5	6.8	2.3	100
GR 25 C	22	25	31.5	1.8	6.8	1.9	100
GR 30 C	26.5	30	45.3	3.4	7	1.7	100
GR 38 C	32	38	51.8	3.1	7	1.8	100
GR 50 C	46	47	61	2	9	1.9	100
GR 63 C	59	63.5	77	2	12.1	2.7	100
GR 76 C	73	78.5	91	2	11.7	2.8	100