


Heat Stabilised Cable Ties

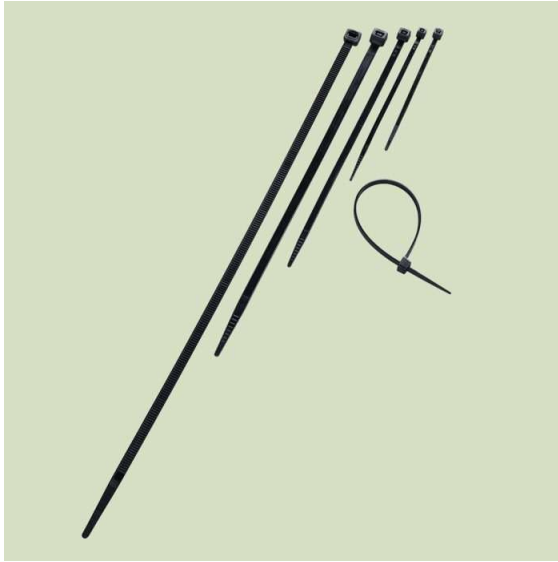

Novoflex Cab Lok Heat Stabilized Cable Ties are high performance ties with superior tensile strength. They are manufactured from the toughest of materials, 100% pure and virgin Nylon 6.6 thus imparting a 50% greater tensile strength (measured at DAM values) than the industry standard. Our Cable Ties offer a superior construction that is lightweight yet offers unmatched durability throughout the life of the product. They can be used manually or in conjunction with our tensioning tools.

We recommend the usage of tensioning tools to achieve optimum tightening and a neat finish to your installations.

Novoflex Cab Lok Heat Stabilized Cable Ties are used for applications involving continuous or extended exposure to high temperatures up to 115°C. These Ties contain specific formulated heat stabilizers to provide thermal endurance.

Material: **UL Listed Nylon 6.6**, Resistant to Fungus, Corrosion, and most mild acids.

Flammability Rating: **UL94 V-2**.

Standard Colour: **UV Resistant Black (B)**.

Continuous Operating Temperature: **-25° C to +115° C**.


Intermittent Operating Temperature: **-25° C to +150° C (up to 500 hours)**.

Halogen Free: **Yes**.

Tensile Strength: **High Tensile Strength** provides a secure locking which will not slip, come off or slacken. Ties must be cut to be removed.

Storage Conditions: To be stored in a cool, dark, dry place away from sunlight in a sealed condition.

Example Applications: Automobiles, Railways, Aviation, Ship Building, Consumer Durables, Electronics, Control Panels.

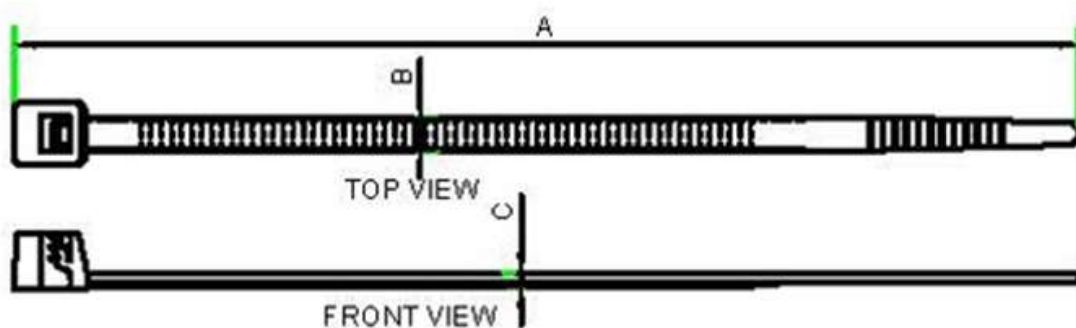

NOVOFLEX - Heat Stabilised Cable Ties						
Novoflex Part No	Length (A) - mm	Width (B) - mm	Thickness (C) - mm	Min Loop Tensile Strength (kgf)	Max Bundle Dia - mm	Standard Packing (Nos)
CPS 100 HSB	100	2.5	1	8	24	1000
CPSS 150 HSB	150	2.5	1.1	8	40	1000
CPSS 200 HSB	200	2.5	1.2	8	55	1000
CPS 30150 HSB	150	3	1.1	12	38	1000
CPS 150 HSB	150	3.6	1.2	14	36	1000
CPS 30200 HSB	200	3	1.1	12	54	100
CPS 200 HSB	200	3.6	1.2	14	54	100
CPS 250 HSB	250	3.6	1.2	14	70	100
CPSS 300 HSB	300	3.6	1.2	14	86	100
CPSS 370 HSB	370	3.6	1.2	14	108	100
CP 200 HSB	200	4.7	1.2	22	50	100
CP 250 HSB	250	4.7	1.3	22	64	100
CPS 300 HSB	300	4.7	1.3	22	82	100
CPS 368 HSB	368	4.7	1.3	22	103	100
CPS 450 HSB	450	4.8	1.4	22	130	100



CPS 550 HSB	550	4.6	1.3	22	162	100
CP 150 HD HSB	150	7.6	1.5	55	32	100
CP 200 HD HSB	200	7.6	1.5	55	49	100
CP 250 HD HSB	250	7.6	1.5	55	65	100
CP 300 HSB	300	7.6	1.6	55	76	100
CP 380 HSB	380	7.6	1.5	55	108	100
CP 450 HSB	450	7.5	1.6	55	125	100
CP 550 HSB	550	9	1.8	80	156	100
CP 610 HSB	610	9	1.8	80	170	100
CP 750 HSB	750	9	1.8	80	219	100
CP 920 HSB	920	9	1.8	80	275	100
CP 650 EHD HSB	650	12.2	2	90	185	100

